




Model KO-BSC

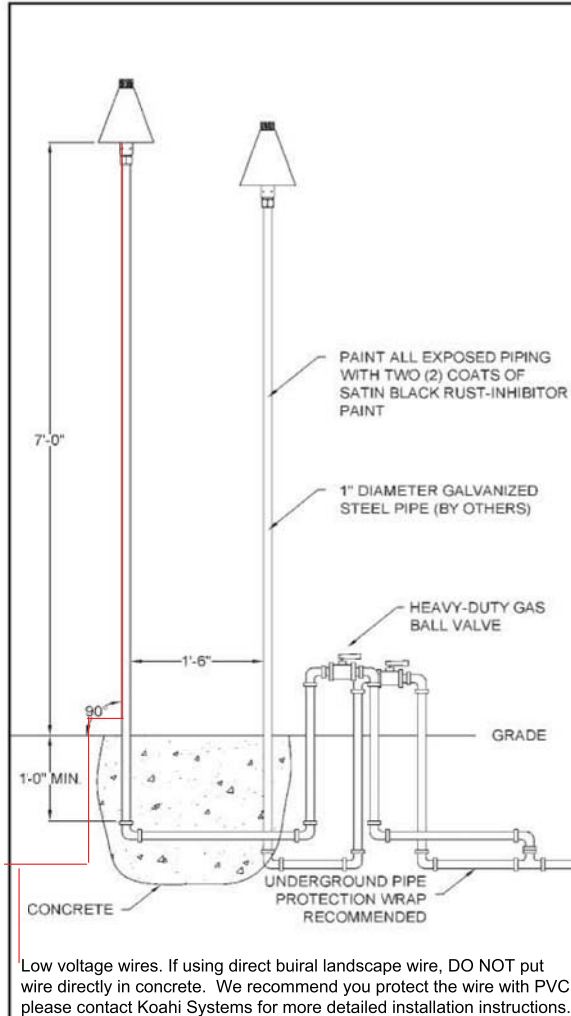

CONSTRUCTION

Cone/Base: Spun copper, 18 ga. (.043" thickness).

GAS USAGE

KO-BSC-NG (Natural Gas). Uses 22,500 BTUs per hour at a 7" water column.

KO-BSC-LP (Propane Gas). Uses 14,600 BTUs per hour at an 11" water column.

INSTALLATION

Adapter: 1" brass adapter has standard female pipe threads for connection to a 1" (NPT) male pipe thread.


Valve: 1" brass shut-off valve included.

IGNITION

Automated hot surface ignitor, powered by 12 vac

LISTING

CSA/AGA design certified (CSA certification #190030-1711907) *always check with local codes prior to installation.

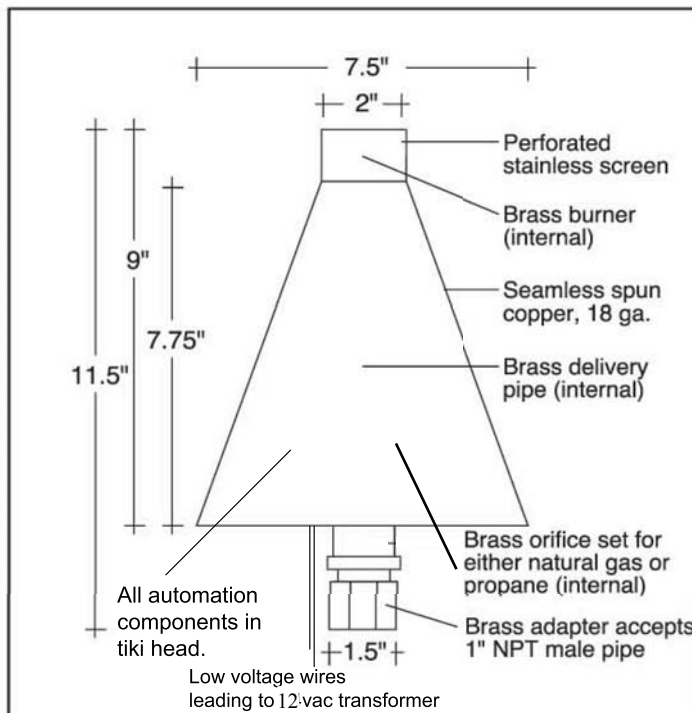

KO'AHĪ

TECHNOLOGY TO FIRE

P.O. Box 437281, Kamuela, HI 96743
Phone: 808.792.7081, Fax: 888.275.3575
<http://www.koahi.com>



Phone: 808-263-5717 • Fax: 808-263-7961
www.BeachsideLighting.com